

# D-415

PRODUCT INFORMATION





## ECO D-415.ER (U-shape double-cranked)

Stainless steel oval rosette fittings for profile frame doors, tested according to EN 1906 class 4, fire-protection tested according to DIN 18273 for escape doors and emergency exits according to EN 179. Bearing fixable in steel basement; friction bearing technology with self-lubricating plastic; optional available with positioning studs. Continuous, invisible screw connection.

### Performance features

- Material: Stainless steel, satin finish
- Object quality EN 1906 class 4, fire-protection tested according to DIN 18273
- The lever guidance consists of a maintenance-free friction bearing with self-lubricating plastic
- Lever with fixable bearing. Right/left useable
- Steel basement
- Concealed screw connection
- Optional with positioning studs
- Lever diameter: 21 mm

### Note

- Design harmonized to window handle
- Approved for escape doors and emergency exits according to EN 179
- Optional with spring support


### Surface

- Stainless steel 1.4301, satin finish


### Types

- Door lever set D 415.ER
- FS-door lever set D 415.ER.FS


# OVAL ROSETTE FITTINGS FOR PROFILE FRAME DOORS (OVR)

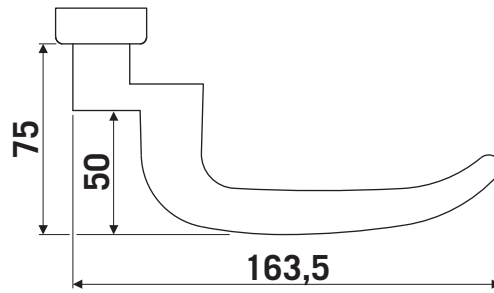


## Rosettes



**PZ**  
FS-PZ




**RZ**  
FS-RZ




**Blind**  
FS-Blind

## Knobs



**WSG K-110/120**  
FS-WSG




**WSG K-160**  
FS-WSG


## Product family



**D-410**



**D-490 (XXL)**



**F-410**