


# D-490

PRODUCT INFORMATION





## ECO D-490.ER.14 (U-shape design XXL)

Stainless steel object fittings with ball bearing technology, tested according to EN 1906 class 4, fire-protection tested according to DIN 18273 for escape doors and emergency exits according to EN 179. Bearing fixable in stainless steel basement with positioning studs. Continuous, invisible screw connection. Ball bearing technology with spring support. Extremely long types (163 mm) suitable for use in hospitals, nursing homes and kindergartens.

### Performance features

- Material: Stainless steel, satin finish
- Object quality EN 1906 class 4, fire-protection tested according to DIN 18273
- The lever guidance consists of a closed maintenance-free ball bearing
- With spring support
- Lever with fixable bearing. Right/left useable
- Stainless steel basement with positioning studs
- Concealed, continuous screw connection
- Lever length: 163 mm

### Application areas

- Hospitals, kindergartens, residential homes

### Note


- Suitable drill template available, art. no. 930 318
- Design harmonized to window handle
- Approved for escape doors and emergency exits according to EN 179
- 9 mm square spindle standard, types 8mm with adjustment sleeve

### Surface



- Stainless steel 1.4301, satin finish

### Rosette fittings

- |                        |                      |
|------------------------|----------------------|
| ■ Door lever/lever set | D 490.ER.14.FS-DD    |
| ■ Door knob/lever set  | D 490.ER.14.FS-WSG   |
| ■ Bathroom set         | D 490.ER.14.FS-WC    |
| ■ Panic set            | D 490.ER.14.PANIK-DD |

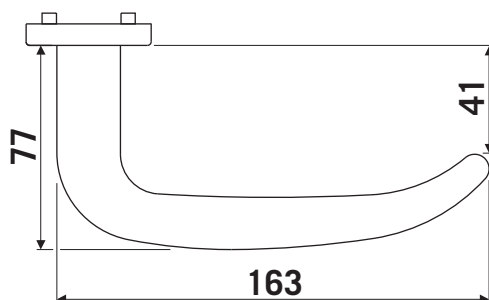


## Rosettes




**PZ**  
**FS-PZ** 



**WC**




**WSG K-130**  
**FS-WSG** 




**WSG K-165**  
**FS-WSG** 


## Product family



**D-410**



**D-415**



**F-410**