

# TS-12

PRODUCT INFORMATION





## TS-12

### Performance features

- Closing speed continuously adjustable.
- Closing force incrementally adjustable.
- Latching speed continuously adjustable.
- Same version for DIN-L and DIN-R.
- Max. door width: 950 mm.
- The sharply trailing opening moment makes the door easier to open, increasing walking comfort.
- With cover and slide rail available in stainless steel.

Different closing force achieved by re-adjusting the door closer on the door leaf. Mounting plate with hole groups for installation according to EN 1154, Supplement 1 available as accessory. ECO slide rails for a door with one or two leaves are variably usable for TS-12.

### Application range

- For light and heavy inside doors.
- For light outside doors.
- For fire and smoke protection doors up to 950 mm.

### Colours

Silver RAL 9006


White RAL 9016

Brown RAL 8014

Stainless steel,  
satin finish

Stainless steel,  
polished finish

Other colours upon request.

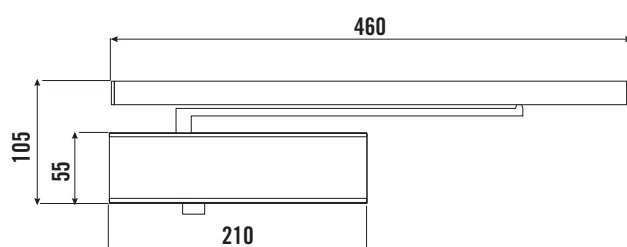

- With continuous closing force adjustment. Min. 18 Nm, max. 24 Nm, size 3 according to EN 1154 A.
- Illustration with slide rail B