

TS-51

PRODUCT INFORMATION





F EN 1154 A

TS-51

Performance features

- Closing speed continuously adjustable.
- Closing force continuously adjustable.
- Latching speed continuously adjustable.
- Opening buffer continuously adjustable.
- Same version for DIN-L and DIN-R.
- Max. door width: 1100 mm.
- The sharply trailing opening moment makes the door easier to open, increasing walking comfort.
- With cover and slide rail available in stainless steel.

ECO slide rails for a door with one or two leaves are variably usable for TS-51.

Application range

- For light and heavy inside doors.
- For light outside doors.

Colours

Silver RAL 9006


White RAL 9016

Brown RAL 8014

Stainless steel,
satin finish

Stainless steel,
polished finish

Other colours upon request.

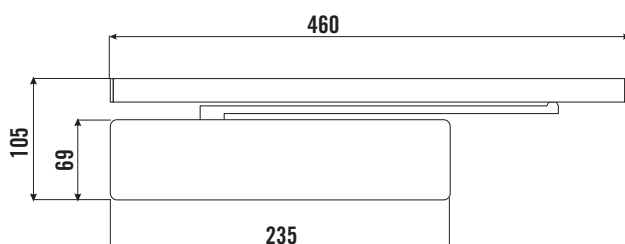

- With continuous closing force adjustment 1-4 according to EN
- Illustration with slide rail B