

# TS-61

PRODUCT INFORMATION





## TS-61

### Performance features

- Closing speed continuously adjustable.
- Closing force continuously adjustable.
- Latching speed continuously adjustable.
- Opening buffer continuously adjustable (optional).
- Closing delay (optional).
- Same version for DIN-L and DIN-R.
- Max. door width: 1250 mm (1400 mm).
- The sharply trailing opening moment makes the door easier to open, increasing walking comfort.
- With cover and slide rail available in stainless steel.

ECO slide rails for a door with one or two leaves are variably usable for TS-61.

### Application range

- For light and heavy inside doors.
- For light and heavy outside doors.
- For fire and smoke protection doors up to 1400 mm.

### Colours

Silver RAL 9006


White RAL 9016

Brown RAL 8014

Stainless steel,  
satin finish

Stainless steel,  
polished finish

Other colours upon request.

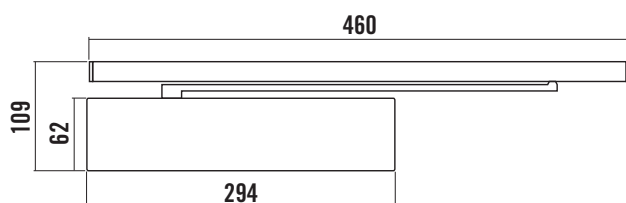

- With continuous closing force adjustment 2-5 (5-6) according to EN 1154 A
- Illustration with slide rail B