


D-110 short plate (K) rectangular




D-110 short plate (K) with OGL – friction bearing technology

Lever handle guidance with a maintenance-free friction bearing made of self-lubricating nylon. Fixed swivel-mounted lever handle. Can be used for DIN left / DIN right. Steel substructure with supporting cams. Non-visible, continuous screw attachment. User category class 4, supporting cams Ø 8 x 5 mm

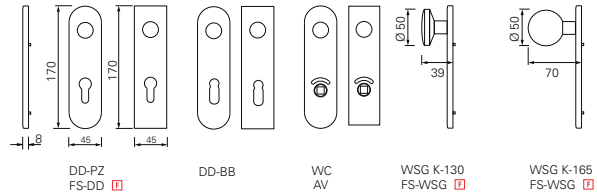

OGL – HANDLE ON SHORT PLATE (K)



F = 4 7 - D1 1 4 0 U



			Fittings set			Passive leaf fittings set		FS knob K-130 / short plate			
	∅	∇									
	23 mm	9 mm			319601.02	319701.02	319603.02	319605.02	319604.02	324276.02	120473.02
	23 mm	9 mm	319601.02	319603.02	319602.02						

Material: PPN nylon, black · Matt finish
 6 mm deep-drawn lever handle guidance. Lever handle with continuous steel core. User category class 3.
 Compatible drilling template available, art. no.: 930317