


D-110 short plate (K) round




D-110 short plate (K) with OGI – friction bearing technology

Lever handle guidance with a maintenance-free friction bearing made of self-lubricating nylon. Fixed swivel-mounted lever handle. Can be used for DIN left / DIN right. Steel substructure with supporting cams. Non-visible, continuous screw attachment. User category class 4, supporting cams Ø 8 x 5 mm

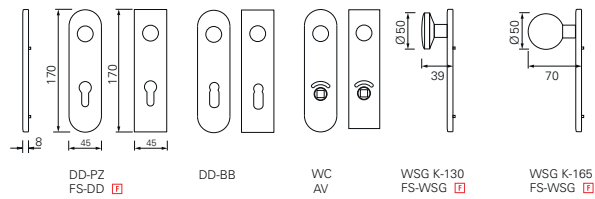

OGI – HANDLE ON SHORT PLATE (K)




EN 1906 EN 179

= 4 7 - B1 1 4 0 U



			Fittings set						Passive leaf fittings set	
	∅	∇								
	21 mm	8 mm		106505.46	106500.46	106510.46	106560.46	106520.46		
	21 mm	9 mm	306081.46	306100.46		306200.46	306263.46		306125.46	306319.46 306317.46
	21 mm	9 mm		306150.46						

Finish: matt brushed, PVD and polished on request.



EN 1906 EN 179


= 4 7 - D1 1 4 0 U



			Fittings set						Passive leaf fittings set	
	∅	∇								
	22 mm	8 mm			107505.30	107500.30	107510.30	107520.30		
	22 mm	9 mm	307081.30	307083.30	307100.30		307200.30		307104.30	307320.30 307317.30
	22 mm	9 mm			307150.30					

Finish: F1 anodised aluminium; further colours available on request.












UGL – HANDLE ON SHORT PLATE (K)



EN 1906 EN 179  

 = 3 7 - D1 1 4 0 U




			Fittings set					Passive leaf fittings set	FS knob K-130 / short plate	
	∅	∇								
	23 mm	8 mm	104505	104500	104510	104520				
	23 mm	9 mm	304100		304200		304108	304317	324040	324042
	23 mm	9 mm	304150							

Material: Nylon · Glossy finish

Note: 6 mm deep-drawn lever handle guidance. Lever handle with continuous steel core. User category class 3. Compatible drilling template available, art. no.: 930317











 Black  Dark grey  White  Red  Blue Further colours available on request.



EN 1906 EN 179  


 = 3 7 - D1 1 4 0 U



			FS half handle set		FS short plate		Fittings set		Passive leaf fittings set	
	∅	∇								
	23 mm	9 mm	314200.02	314202.02	344034.02	324033.02	304600.02	304700.02	304601.02	304617.02
	23 mm	9 mm					304650.02			

Material: Black nylon · Glossy finish












Note: 6 mm deep-drawn lever handle guidance. Lever handle with continuous steel core. User category class 3. Compatible drilling template available, art. no.: 930317



EN 1906 EN 179  

 = 3 7 - D1 1 4 0 U



			Fittings set					Passive leaf fittings set		FS knob K-130 / short plate	
	∅	∇									
	23 mm	9 mm	313600.02	313808.02	313600.02	313700.02	313601.02	313318.02	313617.02	333750.02	324022.03
	23 mm	9 mm			313650.02						

Material: Black nylon · Matt finish with glossy edge

6 mm deep-drawn lever handle guidance. Lever handle with continuous steel core. User category class 3.

Compatible drilling template available, art. no.: 930317